


ED300FD_230V * // metal lathe



highlights

- serially equipped with leadscrew for thread cutting and automatic longitudinal feed
- induction-hardened and precision ground prismatic bed way guides
- hardened main spindle bedded with adjustable taper roll bearings
- high spindle centricity assures maximal turning accuracy
- spindle speed steplessly adjustable, speed can be read off conveniently from digital speed display
- comes with change gears delivering an exceptionally broad thread cutting range
- guides conveniently adjustable via V-ledges ensuring precision for many years
- powerful, maintenance free motor with undervoltage release
- smooth power transmission delivers constant torque
- tailstock can be adjusted for taper turning
- CW/CCW run mode
- the product counts to electric filter class B and has to be EMV protected if used in urban areas

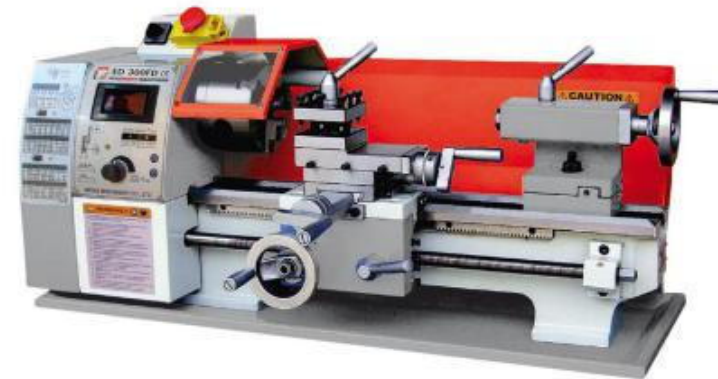

949,00

ED300FD_230V * // metal lathe



technical details

motor power s1 in W	450	motor power s6 in W	630
voltage	230V	bed width in mm	100
total dimensions in mm	740x390x370	cross slide travel in mm	75
tailstock sleeve travel	60	range of inch threads	8-44
range of metric threads in mm/r	(18 S) 0,5-3	lathe spindle speed in min-1	50-2500
max. swing over cross slide in mm	110	tailstock cone	MK2/MT2
spindle nose mount	MK3/MT3	spindle bore in mm	21
carriage travel in mm	276	compound slide travel in mm	55
distance between centers in mm	300	max. swing over bed in mm	180
gross weight in kg	65	net weight in kg	60
packaging length in mm	800	packaging width in mm	480
packaging height in mm	460	EAN code	9120058371431